

# model IL600.xxx.xxx



## Construction


- > Dimensions 6" width x .5" height x 3" depth
- > Stainless steel 20g alloy 304
- > Unibody construction
- > Integrated cleats for easy retrofits
- > Lifetime Limited Warranty
- > C/US UL Listed 1838 Low Voltage Landscape Lighting



## Electrical

- > Low voltage 12vAC operation
- > Overmolded LED circuitry with renewable materials
- > IP68 certified waterproof
- > Choice of energy consumption and color appearance (listed below)
- > 72" long 18/2 leads for connection
- > Magnetic or electronic transformer compatible
- > LED life expectancy up to 40,000 hours

## Dimensions

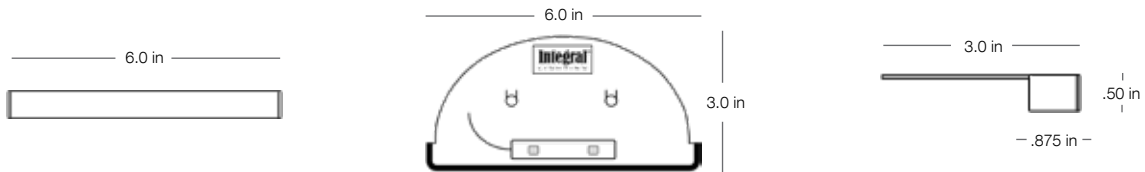

dimensions are approximate

## LED Color Outputs



2400K ultrawarm white  
.5 watt energy consumption  
Output similar to 8 watts  
order model with suffix .550



2700K warm white  
2 watt energy consumption  
Output similar to 10 watts  
order model with suffix .500.200



3000K pure white  
2 watt energy consumption  
Output similar to 10 watts  
order model with suffix .500



4200K cool white  
2 watt energy consumption  
Output similar to 10 watts  
order model with suffix .500.400

## Fixture Finishes




IL600.700.xxx  
Carbon



IL600.710.xxx  
Textured Bronze



IL600.730.xxx  
Platinum



IL600.770.xxx  
Sandstone



IL600.780.xxx  
Light Concrete



IL600.790.xxx  
Dark Concrete



MADE IN THE USA